

Content

List of emergency lighting	4
Emergency luminaires	6
Index	22

This catalogue includes selected standard emergency lighting and components.

For the complete range of Beghelli emergency lighting and systems,
please contact Beghelli-Elplast Customer service.

list of products

emergency luminaires



Aestetica 8



Logica 9



Pratica tuttovetro 10



Pratica bandiera 11



Tuttovetro bandiera 12



Ticinque 13



Leggera IP40

14



Leggera IP65

15



Plexilite

16



Exit lite

17



Metrica

18



Electroinverter
compact

20



emergency luminaires





Aestetica 8



Logica 9




Pratica tuttovetro 10



Pratica bandiera 11



Tuttovetro bandiera 12



Ticinque 13



Leggera IP40 14



Leggera IP65 15




Plexilite 16



Exit lite 17



Metrica 18



Electroinverter compact 20

aestetica



- plastic cover and adhesive legends
(only for 8W - set plastic cover and 4 adhesive legends)



8W - 99-710



AESTETICA FLAG


12150 6W left/right
12151 6W down
12152 8W left/right
12153 8W down

Set of 3 adhesive legends
for 6W - **8785**



Set of 3 adhesive legends
for 8W, 11W - **8788**

1 adhesive legend - down arrow
for 6W - **99-886**
for 8W - **99-888**

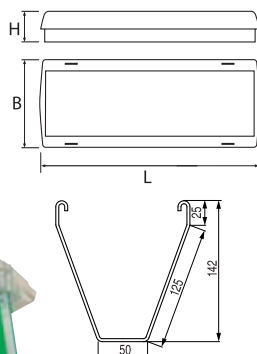

Emergency luminaires



Description: available in 6W, 8W, 11 W, SA (maintained) and SE (non-maintained), 1 and 3 hours versions.

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 40

Rated voltage: 230V/50Hz

Recharging time: 12 hodin

Mounting: designed for ceiling, wall installation and mounting on box 503

Accessories: (must be ordered separately)
additional adhesive legends

W	Code	Article	Duration	Pack./pcs.	Insulation	LxBxH (mm)	Kg
Non maintained lighting							
6	12500	543 6SE 1N	1h	24	II	259x112,5x45,5	0,7
8	12508	544 8SE 1N	1h	24	II	336,4x134,6x46,8	0,8
8	12510	544 8SE 3N	3h	24	II	336,4x134,6x46,8	1,0
11	12520	544 11SE 1N	1h	24	II	336,4x134,6x46,8	0,8
6	12501	543 6SE 1N/RM	1h	24	II	259x112,5x45,5	0,7
8	12509	544 8SE 1N/RM	1h	24	II	336,4x134,6x46,8	0,8
8	12511	544 8SE 3N/RM	3h	24	II	336,4x134,6x46,8	1,0
11	12521	544 11SE 1N/RM	1h	24	II	336,4x134,6x46,8	0,8
Maintained lighting							
8	12504	544 8SA 1N	1h	24	II	336,4x134,6x46,8	0,8
8	12506	544 8SA 3N	3h	24	II	336,4x134,6x46,8	1,0
8	12505	544 8SA 1N/RM	1h	24	II	336,4x134,6x46,8	0,8
8	12507	544 8SA 3N/RM	3h	24	II	336,4x134,6x46,8	1,0



Description: available in 8W, 11W, 24W, SA (maintained) and SE (non-maintained), 1 and 3 hours versions.

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 65

Rated voltage: 198-254V/50Hz

Recharging time: 12 hours

Mounting: ceiling or recessed mounting

Accessories:
provided with:

Code	Article	Pack./pcs.
-	Logica 1 tube clamp	1
12198	recessed box LOGICA IP65	1
12199	bracket for quick wall mounting	1


to be ordered separately:

Code	Article	Pack./pcs.
-	3283-SN	1
3966	3282-DS additional adhesive legends	1
-	3287-BS	1
FB16909	additional adhesive legends	1
<i>German standard</i>		
12194	Logica luminaire grid	1
12193	Logica false ceiling bracket	1

logica sign

Code	Article
97-12102S	LOGICA SIGN LG 8W SE 1-3P
97-12103S	LOGICA SIGN LG 11W SE 1-3P
97-12104S	LOGICA SIGN LG 24W SE 1-3P
97-12105S	LOGICA SIGN LG 8W SA 1-3P
97-12106S	LOGICA SIGN LG 11W SA 1-3P
97-12107S	LOGICA SIGN LG 24W SA 1-3P



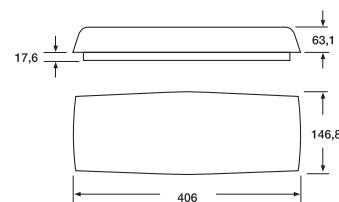






W	Code	Article	Duration	Pack./pcs.	Insulation	Battery	Kg
8	12102	LOGICA LG 8W SE 1-3P	1-3h	6	II	Pb 6V 4Ah	2,4
11	12103	LOGICA LG 11W SE 1-3P	1-3h	6	II	Pb 6V 4Ah	2,4
24	12104	LOGICA LG 24W SE 1-3P	1-3h	6	II	Pb 6V 4Ah	2,5
8	12105	LOGICA LG 8W SA 1-3N	1-3h	6	II	NiCd 7,2V 2,2Ah	2,1
11	12106	LOGICA LG 11W SA 1-3N	1-3h	6	II	NiCd 7,2V 2,2Ah	2,1
24	12107	LOGICA LG 24W SA 1-3N	1-3h	6	II	NiCd 7,2V 2,2Ah	2,1
	12101	UNIT INIBIT	5h	1	II	NiCd 7,2V 0,75Ah	0,5
	12100	MAIN UNIT LOGICA	5h	1	II	NiCd 7,2V 0,75Ah	0,6
18÷58	12126	ELETT 935 2LG 14-80SA	1-3h	12	-	NiCd 7,2V 2,2Ah	0,7




pratica tuttovetro



Accessories: (must be ordered separately)

Code	Article	Description	Pack./pcs.
2733	3928	protective shell (6, 11 W) pro IP 65	15
2734	3929	protective shell (8, 24 W) pro IP 65	15
3907	4201/GP	protective grille (6, 11 W)	1
3908	4301/GP	protective grille (8, 24 W)	1
	 3253-SN		
3896	 3252-DS	additional adhesive legends (6, 11 W)	1
	 3257-BS		
	 3263-SN		
3897	 3262-DS	additional adhesive legends (8, 24 W)	1
	 3267-BS		
	 3273-SN		
3898	 3272-DS	additional adhesive legends (18 W)	1
	 3277-BS		
3723	4004/PR	suspension hooks	1
3727	4003/RG	PG16/PG20 cable gland	1

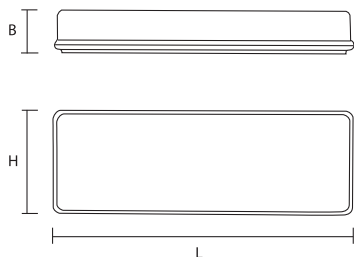

Emergency luminaires



Description: available in 6W, 8W, 11PL W, 18W, 24PL W, SA (maintained) and SE (non-maintained), 1 and 3 hours versions.

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 40/IP 65

Rated voltage: 230V/50Hz (+10%/−6%)


Recharging time: 12 hours

Patented electronic circuit

Mounting: designed for installation with Ø16 or 20mm tubes, suspended mounting or mounting on electrified rail

W	Code	Article	Duration	Nominal flux	Battery	Pack./ pcs.	LxBxH (mm)	Kg
Non maintained lighting								
6	1629	928-6SE1N	1h	270lm	NiCd 6V 0,8Ah	6	304x49x142	1,0
6	1630	928-6SE2N	2h	270lm	NiCd 6V 1,2Ah	6	304x49x142	1,1
8	1651	929-8SE1N	1h	385lm	NiCd 6V 1,2Ah	6	380x49x142	1,5
8	1662	929-8SE3N	3h	385lm	NiCd 3,6V 4Ah	6	380x49x142	1,8
11PL	1714	956-11SE1N	1h	900lm	NiCd 6V 1,2Ah	6	304x55x142	1,2
18	1696	930-18SE1N	1h	1150lm	NiCd 2x6V 1,2Ah	6	660x51x165	2,7
24PL	1725	957-24SE1N	1h	1800lm	NiCd 6V 1,8Ah	6	380x49x142	1,8
Maintained lighting								
8	1652	929-8SA1N	1h	385lm	NiCd 6V 0,8Ah	6	380x49x142	1,6
8	1670	929-8SA3N	3h	385lm	NiCd 6V 1,8Ah	6	380x49x142	1,8
11	1715	956-11SA1N	1h	900lm	NiCd 6V 1,2Ah	6	304x55x142	1,2
18	1697	930-18SA1N	1h	1150lm	NiCd 2x6V 1,2Ah	6	660x51x165	2,8
24PL	1726	957-24SA1N	1h	1800lm	NiCd 6V 1,8Ah	6	380x49x142	1,8

Emergency luminaires

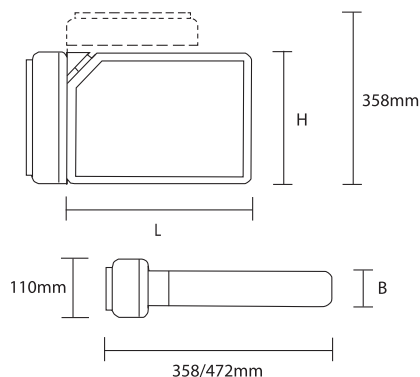

pratica bandiera



Description: available in 2x6W and 2x8W, SA (maintained) or SE (non-maintained) versions. Available also in ecological version with effective life NiMH green batteries.

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 40

Rated voltage: 230V/50Hz (+10%/-6%)

Recharging time: 12 hours

Patented electronic circuit

Mounting: on ceiling or wall

Accessories: (must be ordered separately)

- signalling screen 2x6W/2x8W



PRATICA BANDIERA 2x6W 9166

Ordering code	2757	2755	2756	2758	2760	2771
Description	SQ-SN	SQ-DS	SQ-BS	SQ-EX	SQ-FRS	SQ-FRD



PRATICA BANDIERA 2x8W 9188


Ordering code	2780	2778	2779	2781	2783	2795
Description	SRE-SN	SRE-DS	SRE-BS	SRE-EX	SRE-FRS	SRE-FRD

W	Code	Article	Duration	Nominal flux	Battery	Pack./pcs.	LxBxH (mm)	Kg
Non maintained lighting								
2x6	2308	9166SE2P	2,5h	2x270lm	Pb 6V 6,5Ah	6	276x60x276	2,9
2x6	3653	9166SE2N	2h	2x270lm	NiCd 6V 4Ah	6	276x60x276	2,7
2x8	2320	9188SE2P	2,5h	2x385lm	Pb 6V 6,5Ah	6	390x60x276	3,1
Maintained lighting								
2x6	2311	9166SA2P	2,5h	2x270lm	Pb 6V 6,5Ah	6	276x60x276	3,0
2x8	2324	9188SA2P	2,5h	2x385lm	Pb 6V 6,5Ah	6	390x60x276	3,2




tuttovetro bandiera

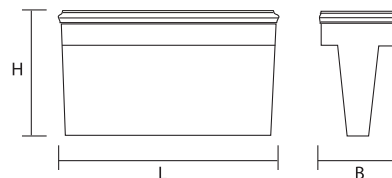

Emergency luminaires



Accessories:
provided with:

Code	Article	Description	Pack./pcs.
2734	3929	protective shell for IP65	15
	 3283-SN		1
3892	 3282-DS	adhesive legends	1
	 3287-BS		2
3723	4004/PR	suspension hooks	1
3727	4003/RG	PG16/PG20 cable gland	1
-		bracket for wall mounting	1

Description: available in 8W, SA (maintained) and SE (non-maintained), 1 and 3 hours versions.

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 40 (IP 65)

Rated voltage: 230V/50Hz

Recharging time: 12 hours


Mounting: on a ceiling or wall, suspended mounting on hooks

W	Code	Article	Duration	Nominal flux	Battery	Pack./pcs.	LxBxH (mm)	Kg
Non maintained lighting								
8	1921	967-8SE1N	1h	385lm	NiCd 6V 1,2Ah	4	380x142x194	1,8
8	1922	967-8SE3N	3h	385lm	NiCd 3,6V 4Ah	4	380x142x194	2,0
8	1923	967-8SE3N RM	3h	385lm	NiCd 3,6V 4Ah	4	380x142x194	2,0
Maintained lighting								
8	1925	967-8SA1N	1h	385lm	NiCd 6V 0,8Ah	4	380x142x194	1,8
8	1926	967-8SA3N	3h	385lm	NiCd 6V 1,8Ah	4	380x142x194	2,0
8	1929	967-8SA1N RM	1h	385lm	NiCd 6V 0,8Ah	4	380x142x194	1,8
8	1930	967-8SA3N RM	3h	385lm	NiCd 6V 1,8Ah	4	380x142x194	2,0

The emergency luminaires are supplied as standard with protective shell for IP65, adhesive legends, suspensions hooks, cable gland PG16-PG20 and bracket for wall mounting.

Emergency luminaires

ticinque

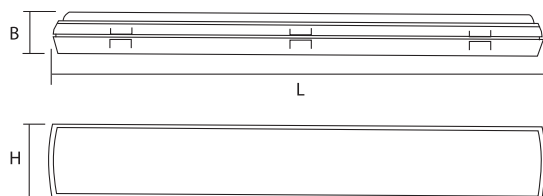

Description: emergency luminaire with lowness for 18W fluorescent lamp, available in SE (non-maintained), 3 hours versions.

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 40 / IP 65

Rated voltage: 230V/50Hz

Mounting: on wall, designed also for installation with \varnothing 16 or 20mm tubes

Accessories: - Provided with: PG16/PG20 tube gland

Must be ordered separately: adhesive legends

11593  1 ks

11594  1 ks

11595  1 ks

	W	Code	Article	Duration	Nominal flux	Battery	Pack./pcs.	LxBxH (mm)	Kg
Non maintained lighting									
IP40	18	8580	TICINQUE 541-18SE3P	3h	1150lm	Pb 6V 3,6 Ah	6	608x53x114	1,4
	18	8581	TICINQUE 541-18SE3P/RM	3h	1150lm	Pb 6V 3,6 Ah	6	608x53x114	1,4
IP65	18	8582	TICINQUE IP 65 545-18SE3P	3h	1150lm	Pb 6V 3,6 Ah	6	608x53x114	1,5
	18	8583	TICINQUE IP 65 545-18SE3P/RM	3h	1150lm	Pb 6V 3,6 Ah	6	608x53x114	1,5

leggera IP40



Must be ordered separately:

Code	Article	Description	Pack./pcs.
3907	4201/GP	protective grille (6, 11 W)	1
3908	4301/GP	protective grille (8, 24 W)	1
2741	3974/IP	recessed box (6, 11 W)	12
2738	3976/IP	recessed box (8, 24 W)	12
3893	3293-SN 3292-DS 3297-BS	additional adhesive legends (6, 11 W)	1
3894	3303-SN 3302-DS 3307-BS	additional adhesive legends (8, 24 W)	1
3723	4004/PR	suspension hooks	1

Emergency luminaires



Description: available in 6W, 8W, 11PL W, 24PL W, SA (maintained) and SE (non-maintained), 1 and 3 hours versions.

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 40


Rated voltage: 230V (+10 % / -6 %)

Recharging time: 12 hours

Patented electronic circuit

Mounting: designed for installation with Ø16 or 20mm tubes, for suspended or on electrified rail, can be also mounted in ceiling

Accessories: - Provided with: PG16/PG20 tube gland

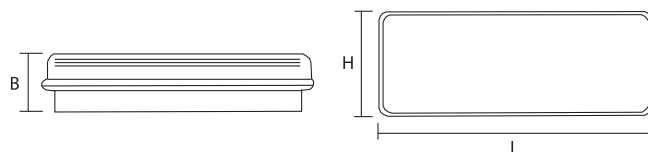

W	Code	Article	Duration	Emergency efficiency	Nominal flux	Battery	Pack./pcs.	LxBxH (mm)	Kg
Non maintained lighting									
6	2059	992-6SE1N	1h	35%	270 lm	NiCd 3,6V 0,8Ah	12	280x60x120	0,9
6	2060	992-6SE3N	3h	35%	270 lm	NiCd 3,6V 1,8Ah	12	280x60x120	1,0
8	2064	993-8SE1N	1h	26%	385 lm	NiCd 3,6V 0,8Ah	6	400x65x150	1,4
8	2065	993-8SE3N	3h	26%	385 lm	NiCd 3,6V 1,8Ah	6	400x65x150	1,7
11PL	2073	994-11SE1N	1h	24%	900 lm	NiCd 3,6V 1,2Ah	12	280x60x120	0,9
24PL	2075	995-24SE1N	1h	25%	1800 lm	NiCd 6V 1,8Ah	6	400x65x150	1,7
Maintained lighting									
8	2066	993-8SA1N	1h	25%	385 lm	NiCd 6V 0,8Ah	6	400x65x150	1,6
8	2067	993-8SA3N	3h	25%	385 lm	NiCd 6V 1,8Ah	6	400x65x150	1,7
24PL	2077	995-24SA1N	1h	22%	1800 lm	NiCd 6V 1,8Ah	6	400x65x150	1,7

Emergency luminaires



Description: available in 6W, 8W, 11PL W, 18W, 24PL W, SA (maintained) and SE (non-maintained), 1 and 3 hours versions.

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 65

Rated voltage: 230V (+10 % / -6 %)

Recharging time: 12 hours

Patented electronic circuit

Mounting: designed for installation with Ø16 or 20mm tubes, for suspended or on electrified rail, can be also mounted on ceiling

Accessories: Provided with

- flexible joint Ø16 and Ø20mm
- PG16/PG20 tube gland


W	Code	Article	Duration	Emergency efficiency	Nominal flux	Battery	LxBxH (mm)	Kg
Non maintained lighting								
6	8091	LEGGERA IP65 6SE1N	1h	35%	270lm	NiCd 3,6V 0,8Ah	280x70x120	0,9
6	8092	LEGGERA IP65 6SE3N	3h	35%	270lm	NiCd 3,6V 1,8Ah	280x70x120	1,0
8	8095	LEGGERA IP65 8SE1N	1h	26%	385lm	NiCd 3,6V 0,8Ah	400x73x150	1,4
8	8096	LEGGERA IP65 8SE3N	3h	26%	385lm	NiCd 3,6V 1,8Ah	400x73x150	1,7
11PL	8103	LEGGERA IP65 11SE1N	1h	24%	900lm	NiCd 3,6V 1,2Ah	280x70x120	0,9
18	8109	LEGGERA IP65 18SE3P	3h	25%	1150lm	Pb 6V 4Ah	660x94x114	2,6
24PL	8105	LEGGERA IP65 24SE1N	1h	25%	1800lm	NiCd 6V 1,8Ah	400x73x150	1,7
Maintained lighting								
8	8097	LEGGERA IP65 8SA1N	1h	25%	385lm	NiCd 6V 0,8Ah	400x73x150	1,4
8	8098	LEGGERA IP65 8SA3N	3h	35%	385lm	NiCd 6V 1,8Ah	400x73x150	1,7
18	8110	LEGGERA IP65 18SA3P	3h	27%	1150lm	Pb 6V 4Ah	660x94x114	2,6
24PL	8107	LEGGERA IP65 24SA1N	1h	22%	1800lm	NiCd 6V 1,8Ah	400x73x150	1,7

leggera IP65




Must be ordered separately:

Code	Article	Description	Pack./ pcs.
2742	4974/IP	recessed box IP 65 (6, 11 W)	12
2739	4976/IP	recessed box IP 65 (8, 24 W)	12
3907	4201/GP	protective grille (6, 11 W)	1
3905	4500/GP	protective grille (18 W)	1
3912	4701/GP	protective grille (8, 24 W) IP65	1
	3293-SN		
3893	3292-DS	additional adhesive legends (6, 11 W)	1
	3297-BS		
	3303-SN		
3894	3302-DS	additional adhesive legends (8, 24 W)	1
	3307-BS		
	3139-SN		
3900	3138-DS	additional adhesive legends (18 W)	1
	3311-BS		
3723	4004/PR	suspension hooks	1



plexilite

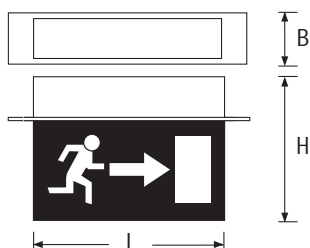

Emergency luminaires



Description: available in 8W SA (maintained) and SE (non-maintained), 1 and 3 hours versions.

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 40

Rated voltage: 230V/50Hz

Recharging time: 12 hours

Mounting: recessed installation

Accessories: - bracket for recessed installation

W	Code	Article	Duration	Battery	LxBxH (mm)	Kg
Non maintained lighting						
8	11048	PLEXILITE 535 8SE1N DX/SX	1h	NiCd 6V 0,75Ah	390x70x280	2,9
8	11049	PLEXILITE 535 8SE3N DX/SX	3h	NiCd 6V 2Ah	390x70x280	3,0
8	11050	PLEXILITE 535 8SE1N BASSO	1h	NiCd 6V 0,75Ah	390x70x280	2,9
8	11051	PLEXILITE 535 8SE3N BASSO	3h	NiCd 6V 2Ah	390x70x280	3,0
8	11056	PLEXILITE 535 8SE1N/RM DX/SX	1h	NiCd 6V 0,75Ah	390x70x280	2,9
8	11057	PLEXILITE 535 8SE3N/RM DX/SX	3h	NiCd 6V 2Ah	390x70x280	3,0
8	11058	PLEXILITE 535 8SE1N/RM BASSO	1h	NiCd 6V 0,75Ah	390x70x280	2,9
8	11059	PLEXILITE 535 8SE3N/RM BASSO	3h	NiCd 6V 2Ah	390x70x280	3,0
Maintained lighting						
8	11052	PLEXILITE 535 8SA1N DX/SX	1h	NiCd 6V 0,75Ah	390x70x280	2,9
8	11053	PLEXILITE 535 8SA3N DX/SX	3h	NiCd 6V 2Ah	390x70x280	3,0
8	11054	PLEXILITE 535 8SA1N BASSO	1h	NiCd 6V 0,75Ah	390x70x280	2,9
8	11055	PLEXILITE 535 8SA3N BASSO	3h	NiCd 6V 2Ah	390x70x280	3,0

Emergency luminaires

exit lite



Description: new high efficiency LED technology, available in SA (maintained) version, lamp life cycle more than 10 years

Material: self-snuffing plastic (standard EN 60598-1, UL 94)

Degree of protection: IP 40

Rated voltage: 230V/50Hz

Recharging time: 12 hours

Mounting: on ceiling or on wall

Accessories: Provided with


- wall installation bracket
- signalling screen

Must be ordered separately:

9021 - ceiling mounting bracket

9075 - wall mounting bracket (one face)

3503 - single suspension with cable (1200mm)

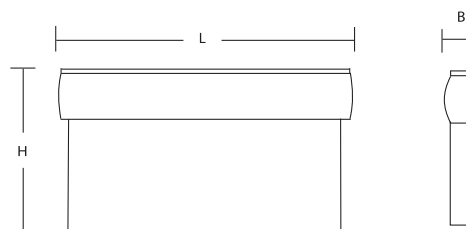

Code	Article	Duration	Battery	Pack./pcs.	LxBxH (mm)	Kg
3969	EXITLITE SA 1N DX/SX	1h	NiCd 6V 0,75Ah	4	380x58x240	1,6
3970	EXITLITE SA 3N DX/SX	3h	NiCd 6V 1,2Ah	4	380x58x240	1,7
3972	EXITLITE SA 3H DX/SX	3h	NiMH 6V 1,2Ah	4	380x58x240	1,6
3977	EXITLITE SA 1N BASSO	1h	NiCd 6V 0,75Ah	4	380x58x240	1,6
3978	EXITLITE SA 3N BASSO	3h	NiCd 6V 1,2Ah	4	380x58x240	1,7
3980	EXITLITE SA 3H BASSO	3h	NiMH 6V 1,2Ah	4	380x58x240	1,6
3973	EXITLITE SA 1N/RM DX/SX	1h	NiCd 6V 0,75Ah	4	380x58x240	1,6
3974	EXITLITE SA 3N/RM DX/SX	3h	NiCd 6V 1,2Ah	4	380x58x240	1,7
3976	EXITLITE SA 3H/RM DX/SX	3h	NiMH 6V 1,2Ah	4	380x58x240	1,6
3981	EXITLITE SA 1N/RM BASSO	1h	NiCd 6V 0,75Ah	4	380x58x240	1,6
3982	EXITLITE SA 3N/RM BASSO	3h	NiCd 6V 1,2Ah	4	380x58x240	1,7
3984	EXITLITE SA 3H/RM BASSO	3h	NiMH 6V 1,2Ah	4	380x58x240	1,6

MetricaLED IP40


Emergency luminaires

metrica
LED



6-11 W

8-18-24 W

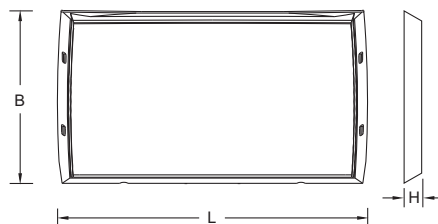

Accessories: must be ordered separately

Code	Description	Pack/ pcs.
12942	RECESS MOUNTING KIT METRICA 6/11W	1
12943	RECESS MOUNTING KIT METRICA 8/18/24W	1

Accessories: supplied only with maintained (SA) version

Code	Description	Pack/ pcs.
12941	ADES LEFT RIGHT DOWN METRICA 8/18/24W	1

Luminaire delivering high luminous efficiency. Power LED light source with a lifespan of 100,000 hours. Polycarbonate housing, highly transparent shield. Wide-beam metallized polycarbonate louver with a complex faceted geometry and sequential planes of reflection. High-efficiency electronic circuit in SE (non-maintained), SA (maintained) versions with 1h or 3h of duration.

metrica
LED


W	Code	Article	LED	Duration	Battery	Luminous flux*	Pack	LxBxH (mm)	Kg
6	12900	METRICA LED IP40 AT 6W SE 1N	1	1h	NiCd HT 4.8V 0.75AH PACK	58 lm	1	213x157x50	0,6
6	12901	METRICA LED IP40 AT 6W SE 3N	1	3h	NiCd HT 4.8V 1.7AH SC TYPE AA	58 lm	1	213x157x50	0,7
8	12904	METRICA LED IP40 AT 8W SE 1N	2	1h	NiCd HT 6V 0.75AH AA PACK	60 lm	1	355x179x57	0,8
8	12905	METRICA LED IP40 AT 8W SE 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	60 lm	1	355x179x57	0,9
8	12908	METRICA LED IP40 AT 8W SA 1N	2	1h	NiCd HT 6V 0.75AH AA PACK	60 lm	1	355x179x57	0,8
8	12909	METRICA LED IP40 AT 8W SA 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	60 lm	1	355x179x57	0,9
11	12912	METRICA LED IP40 AT 11W SE 1N	1	1h	NiCd HT 4.8V 0.75AH PACK	82 lm	1	213x157x50	0,6
11	12913	METRICA LED IP40 AT 11W SE 3N	1	3h	NiCd HT 4.8V 1.7AH SC TYPE AA	82 lm	1	213x157x50	0,7
18	12920	METRICA LED IP40 AT 18W SE 1N	2	1h	NiCd HT 6V 0.75AH AA PACK	116 lm	1	355x179x57	0,8
18	12921	METRICA LED IP40 AT 18W SE 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	116 lm	1	355x179x57	0,9
18	12924	METRICA LED IP40 AT 18W SA 1N	2	1h	NiCd HT 6V 0.75AH AA PACK	116 lm	1	355x179x57	0,8
18	12925	METRICA LED IP40 AT 18W SA 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	116 lm	1	355x179x57	0,9
24	12928	METRICA LED IP40 AT 24W SE 1N	2	1h	NiCd HT 4.8V 1.7AH SC TYPE AA	142 lm	1	355x179x57	0,8
24	12929	METRICA LED IP40 AT 24W SE 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	142 lm	1	355x179x57	0,9
24	12932	METRICA LED IP40 AT 24W SA 1N	2	1h	NiCd HT 4.8V 1.7AH SC TYPE AA	142 lm	1	355x179x57	0,8
24	12933	METRICA LED IP40 AT 24W SA 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	142 lm	1	355x179x57	0,9

* In the case of LED lamps, the luminous flux remains constant throughout the duration of emergency operation: therefore, the lumen rating can be considered to correspond to the average flow.

Emergency luminaires

metrica
LED

MetricaLED IP65

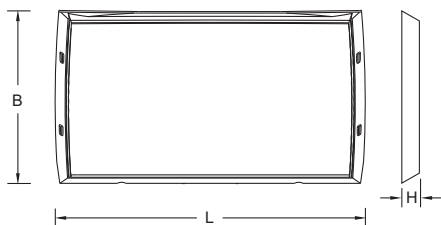

Luminaire delivering high luminous efficiency. Power LED light source with a lifespan of 100,000 hours. Monolithic optical assembly to seal out dust. Polycarbonate housing, highly transparent shield. Wide-beam metallized polycarbonate louver with complex faceting and sequential planes of reflection. Sealing gasket made of expanded EPDM, resistant to aging and atmospheric agents. High-efficiency electronic circuit in SE (non-maintained), SA (maintained) versions with 1h or 3h of duration.



8-18-24 W




6-11 W

Accessories: must be ordered separately

Code	Description	Pack/ pcs.
12942	RECESS MOUNTING KIT METRICA 6/11W	1
12943	RECESS MOUNTING KIT METRICA 8/18/24W	1

Accessories: supplied

Code	Descriptive Description	Pack/ pcs.
3727	4003/RG tube clamp PG16/PG20	1
12941 *	 ADES LEFT RIGHT DOWN METRICA 8/18/24W	1


* Pictograms are supplied for 8/18/24W SA (maintained) versions only

metrica
LED

W	Code	Article	LED Duration		Battery	Luminous flux*	Pack	LxBxH (mm)	Kg
6	12902	METRICA LED IP65 AT 6W SE 1N	1	1h	NiCd HT 4.8V 0.75AH PACK	58 lm	1	213x157x50	0,6
6	12903	METRICA LED IP65 AT 6W SE 3N	1	3h	NiCd HT 4.8V 1.7AH SC TYPE AA	58 lm	1	213x157x50	0,7
8	12906	METRICA LED IP65 AT 8W SE 1N	2	1h	NiCd HT 6V 0.75AH AA PACK	60 lm	1	355x179x57	0,8
8	12907	METRICA LED IP65 AT 8W SE 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	60 lm	1	355x179x57	0,9
8	12910	METRICA LED IP65 AT 8W SA 1N	2	1h	NiCd HT 6V 0.75AH AA PACK	60 lm	1	355x179x57	0,8
8	12911	METRICA LED IP65 AT 8W SA 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	60 lm	1	355x179x57	0,9
11	12914	METRICA LED IP65 AT 11W SE 1N	1	1h	NiCd HT 4.8V 0.75AH PACK	82 lm	1	213x157x50	0,6
11	12915	METRICA LED IP65 AT 11W SE 3N	1	3h	NiCd HT 4.8V 1.7AH SC TYPE AA	82 lm	1	213x157x50	0,7
18	12922	METRICA LED IP65 AT 18W SE 1N	2	1h	NiCd HT 6V 0.75AH AA PACK	116 lm	1	355x179x57	0,8
18	12923	METRICA LED IP65 AT 18W SE 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	116 lm	1	355x179x57	0,9
18	12926	METRICA LED IP65 AT 18W SA 1N	2	1h	NiCd HT 6V 0.75AH AA PACK	116 lm	1	355x179x57	0,8
18	12927	METRICA LED IP65 AT 18W SA 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	116 lm	1	355x179x57	0,9
24	12930	METRICA LED IP65 AT 24W SE 1N	2	1h	NiCd HT 4.8V 1.7AH SC TYPE AA	142 lm	1	355x179x57	0,8
24	12931	METRICA LED IP65 AT 24W SE 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	142 lm	1	355x179x57	0,9
24	12934	METRICA LED IP65 AT 24W SA 1N	2	1h	NiCd HT 4.8V 1.7AH SC TYPE AA	142 lm	1	355x179x57	0,8
24	12935	METRICA LED IP65 AT 24W SA 3N	2	3h	NiCd HT 7.2V 1.7AH SC TYPE AA	142 lm	1	355x179x57	0,9

* In the case of LED lamps, the luminous flux remains constant throughout the duration of emergency operation: therefore, the lumen rating can be considered to correspond to the average flow.

compact | electroinverter

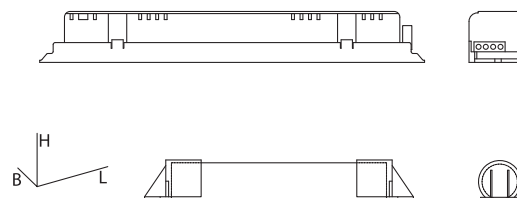

Description: electronic conversion kit for T5 and T8 fluorescent lamps.

Easy to install within ceiling light fittings, it supplies them in the event of a power failure.

Recharging time: 12 hours

LED indicating: the presence of power supply and activation of the recharge circuit

Operating temperature: ta 0-40°C

Rated voltage: 230V-50Hz

T8

W	Code	Article	Duration	Battery	Pack./pcs.
18÷58	12478	EL E843/18-58 6V SA1N	1h	NiCd 4,8V 1,7Ah	12
18÷58	12480	EL E843/18-58 6V SA1N	1h	NiCd 6V 4Ah	12
18÷58	12482	EL E843/18-58 6V SA3N	3h	NiCd 6V 4Ah	12
18÷58	12484	EL E843/18-58 6V SA1P	1h	Pb 6V 4Ah	12
18÷58	12486	EL E843/18-58 6V SA3P	3h	Pb 6V 4Ah	12
18÷58	12481	EL E843/18-58 6V SA1N RM	1h	NiCd 6V 4Ah	12
18÷58	12483	EL E843/18-58 6V SA3N RM	3h	NiCd 6V 4Ah	12
18÷58	12485	EL E843/18-58 6V SA1P RM	1h	Pb 6V 4Ah	12
18÷58	12487	EL E843/18-58 6V SA3P RM	3h	Pb 6V 4Ah	12
18÷58	12513	839/18-58W SA (Aestetica inv.)	1h	NiCd 4,8V 1,7Ah	12

Dimensions (mm)			Dimensions (mm)		
	L	B	H	Ø	Typ
INVERTER					
12478	235	30	26		
12480, 12481	230	30	26		
12482, 12483	230	30	26		
12484, 12485	230	30	26		
12486, 12487	230	30	26		
12513	232	40	36		
BATTERY					
	205			30	NiCd
	340			37	NiCd
	340			37	NiCd
	200	45	45		Pb
	200	45	45		Pb
	210			30	NiCd

T5

W	Code	Article	Duration	Battery	Pack./pcs.
14÷24	12488	EL E843/14-24 4.8V SA1N T5	1h	NiCd 4.8V 1.7Ah	12
14÷28	12490	EL E843/14-28 6V SA3N T5	3h	NiCd 6V 4Ah	12
28÷80	12492	EL E843/28-80 6V SA1N T5	1h	NiCd 6V 4Ah	12
28÷80	12494	EL E843/28-80 6V SA1P T5	1h	PB 6V 4Ah	12
14÷24	12489	EL E843/14-24 4.8V SA1N T5 RM	1h	NiCd 4.8V 1.7Ah	12
14÷28	12491	EL E843/14-28 6V SA3N T5 RM	3h	NiCd 6V 4Ah	12
28÷80	12493	EL E843/28-80 6V SA1N T5 RM	1h	NiCd 6V 4Ah	12
28÷80	12495	EL E843/28-80 6V SA1P T5 RM	1h	PB 6V 4Ah	12

Dimensions (mm)			Dimensions (mm)		
	L	B	H	Ø	Typ
INVERTER					
12488, 12489	230	30	26		
12490, 12491	230	30	26		
12492, 12493	230	30	26		
12494, 12495	230	30	26		
BATTERY					
	208			29	NiCd
	340			37	NiCd
	340			37	NiCd
	200	45	45		Pb



Index – emergency luminaires

Code	page	Code	page	Code	page	Code	page
1629	10	3723	10, 12, 14, 15	11055	16	12513	20
1630	10	3727	10, 12, 19	11056	16	12520	8
1651	10	3892	12	11057	16	12521	8
1652	10	3893	14, 15	11058	16	12900	18
1662	10	3894	14, 15	11059	16	12901	18
1670	10	3896	10	11593	13	12902	19
1696	10	3898	10	11594	13	12903	19
1697	10	3900	15	11595	13	12904	18
1714	10	3905	15	12100	9	12905	18
1715	10	3907	10, 14, 15	12101	9	12906	19
1725	10	3908	10, 14	12102	9	12907	19
1726	10	3912	15	12103	9	12908	18
1921	12	3966	9	12104	9	12909	18
1922	12	3969	17	12105	9	12910	19
1923	12	3970	17	12106	9	12911	19
1925	12	3972	17	12107	9	12912	18
1926	12	3973	17	12126	9	12913	18
1929	12	3974	17	12150	8	12914	19
1930	12	3976	17	12151	8	12915	19
2059	14	3977	17	12152	8	12920	18
2060	14	3978	17	12153	8	12921	18
2064	14	3980	17	12193	9	12922	19
2065	14	3981	17	12194	9	12923	19
2066	14	3982	17	12198	9	12924	18
2067	14	3984	17	12199	9	12925	18
2073	14	8091	15	12478	20	12926	19
2075	14	8092	15	12480	20	12927	19
2077	14	8095	15	12481	20	12928	18
2308	11	8096	15	12482	20	12929	18
2311	11	8097	15	12483	20	12930	19
2320	11	8098	15	12484	20	12931	19
2324	11	8103	15	12485	20	12932	18
2733	10	8105	15	12486	20	12933	18
2734	10, 12	8107	15	12487	20	12934	19
2738	14	8109	15	12488	20	12935	19
2739	15	8110	15	12489	20	12941	18, 19
2741	14	8580	13	12490	20	12942	18, 19
2742	15	8581	13	12491	20	12943	18, 19
2755	11	8582	13	12492	20	97-12102S	9
2756	11	8583	13	12493	20	97-12103S	9
2757	11	8785	8	12494	20	97-12104S	9
2758	11	8788	8	12495	20	97-12105S	9
2760	11	9021	17	12500	8	97-12106S	9
2771	11	9075	17	12501	8	97-12107S	9
2778	11	9897	10	12504	8	99-710	8
2779	11	11048	16	12505	8	99-886	8
2780	11	11049	16	12506	8	99-888	8
2781	11	11050	16	12507	8		
2783	11	11051	16	12508	8		
2795	11	11052	16	12509	8		
3503	17	11053	16	12510	8		
3653	11	11054	16	12511	8		

